


ZHEJIANG BIO INDUSTRY&TRADE CO.,LTD
NUM 1269,BADA ROAD,QIUBIN INDUSTRY PARK,JINHUA,CITY,ZHEJIANG PTOVINCE,CHINA

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Description : MOTORCYCLE HELMET
Style / Item No. : HY601
Size : 53cm-54cm
HPI (from basic plane) : 45mm for A-dot
Test Performed : FMVSS 49 CFR 571.218
Sample Receiving Date : Sep 19, 2016
Test Performing Date : Sep 19, 2016 to Sep 28, 2016
Test Result(s) : For further details, please refer to the following page(s)

Signed for and on behalf of
Guangzhou Branch
SGS-CSTC Ltd.



Arthur Mak
Approved Signatory



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
198 Wazhu Road, Sclerotech Park Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075191 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075191 e sgs.china@sgs.com

Test Conducted: Based on FMVSS 49 CFR 571.218 Motorcycle Helmets

Number of Tested Sample: 4 piece(s)

Test Results: Details shown as following table

Clause	Test Method/Requirement	Test Result
5.1	<p>Impact attenuation When an impact attenuation test is conducted in accordance with S7.1, all of the following requirements shall be met:</p> <p>(a) Peak accelerations shall not exceed 400g; (b) Accelerations in excess of 200g shall not exceed a cumulative duration of 2.0 milliseconds; and (c) Accelerations in excess of 150g shall not exceed a cumulative duration of 4.0 milliseconds.</p>	Pass See annex 1
5.2	<p>Penetration When a penetration test is conducted in accordance with S7.2, the striker shall not contact the surface of the test headform.</p>	Pass
5.3	<p>Retention system When tested in accordance with S7.3:</p> <p>(a) The retention system or its components shall attain the loads specified without separation; and (b) The adjustable portion of the retention system test device shall not move more than 1 inch (2.5 cm) measured between preliminary and test load positions.</p>	Pass See annex 2
5.3.2	Where the retention system consists of components which can be independently fastened without securing the complete assembly, each such component shall independently meet the requirements of S5.3.1	N/A
5.4	<p>Configuration Each helmet shall have a protective surface of continuous contour at all points on or above the test line described in S6.2.3. The helmet shall provide peripheral vision clearance of at least 105° to each side of the mid-sagittal plane, when the helmet is adjusted as specified in S6.3. The vertex of these angles, shown in Figure 3, shall be at the point on the anterior surface of the reference headform at the intersection of the mid-sagittal and basic planes. The brow opening of the helmet shall be at least 1 inch (2.5 cm) above all points in the basic plane that are within the angles of peripheral vision</p>	Pass See annex 3
5.5	<p>Projections A helmet shall not have any rigid projections inside its shell. Rigid projections outside any helmet's shell shall be limited to those required for operation of essential accessories, and shall not protrude more than 0.20 inch (5 mm).</p>	Pass
5.6	<p>Labeling Each helmet shall be labeled permanently and legibly, in a manner such that the label(s) can be read easily without removing padding or any other permanent part, with the following:</p>	Pass
5.6.1	(a) Manufacturer's name.	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com

198 Wuzhu Road, Scleritech Park Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075191 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075191 e sgs.china@sgs.com

	(b) Discrete size.	Pass
	(c) Month and year of manufacture. This may be spelled out (for example, June 2010), or expressed in numerals (for example, 6/10).	Pass
	(d) Instructions to the purchaser as follows:	Pass
	(1) "Shell and liner constructed of (identify type(s) of materials)	Pass
	(2) "Helmet can be seriously damaged by some common substances without damage being visible to the user. Apply only the following: (Recommended cleaning agents, paints, adhesives, etc., as appropriate)	Pass
	(3) "Make no modifications. Fasten helmet securely. If helmet experiences a severe blow, return it to the manufacturer for inspection, or destroy it and replace it."	Pass
	(4) Any additional relevant safety information should be applied at the time of purchase by means of an attached tag, brochure, or other suitable means	Pass
	Certification	
	Each helmet shall be labeled permanently and legibly with a label, constituting the manufacturer's certification that the helmet conforms to the applicable Federal motor vehicle safety standards, that is separate from the label(s) used to comply with S5.6.1, and complies with paragraphs (a) through (c) of this section.	Pass
	(a) Content, format, and appearance. The label required by paragraph S5.6.2 shall have the following content, format, and appearance:	Pass
	(1) The symbol "DOT," horizontally centered on the label, in letters not less than 0.38 inch (1.0 cm) high.	Pass
	(2) The term "FMVSS No. 218," horizontally centered beneath the symbol DOT, in letters not less than 0.09 inches (0.23 cm) high.	Pass
	(3) The word "CERTIFIED," horizontally centered beneath the term "FMVSS No. 218," in letters not less than 0.09 inches (0.23 cm) high.	Pass
	(4) The precise model designation, horizontally centered above the symbol DOT, in letters and/or numerals not less than 0.09 inch (0.23 cm) high.	Pass
	(5) The manufacturer's name and/or brand, horizontally centered above the model designation, in letters and/or numerals not less than 0.09 inch (0.23 cm) high.	Pass
	(6) All symbols, letters and numerals shall be in a color that contrasts with the background of the label.	Pass
	(b) Other information. No information, other than the information specified in subparagraph (a), shall appear on the label.	Pass
5.6.2	(c) Location. The label shall appear on the outer surface of the helmet and be placed so that it is centered laterally with the horizontal centerline of the DOT symbol located a minimum of 1 inch (2.5 cm) and a maximum of 3 inches (7.6 cm) from the bottom edge of the posterior portion of the helmet.	Pass

Remark: 1. NA = Not applicable.
2. NT = Not tested as per client's request.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com
198 Wazhu Road, Sclartech Park Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075191 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075191 e sgs.china@sgs.com

Model: HY601

Size: 53-54 cm

Headform: A DOT

HPI: 45 mm

Annex-1 Impact energy attenuation test:

Test Specification: FMVSS 49 CFR 571.218

Ambient temperature at time of test: 22 °C

Condition	Test Anvil	Test Site	Peak' G	Duration at 150 g(ms)	Duration at 200 g(ms)	Assessment
Ambient (Clause 6.4.1 a) 1064g No.1	Flat	Front	205.8	2.30	0.88	Pass
			215.6	2.41	0.95	
	Flat	Right	196.5	1.30	0.00	Pass
			206.2	2.12	0.86	
	Hemi	Left	163.5	0.22	0.00	Pass
			184.2	0.76	0.00	
	Hemi	Rear	176.5	0.55	0.00	Pass
			193.1	1.22	0.00	
Hot (Clause 6.4.1 b) 1062g No.2	Flat	Front	170.9	0.65	0.00	Pass
			208.4	2.17	1.05	
	Flat	Rear	211.9	2.27	1.12	Pass
			229.6	2.42	1.38	
	Hemi	Left	178.9	0.29	0.00	Pass
			184.4	0.84	0.00	
	Hemi	Right	167.9	0.50	0.00	Pass
			187.4	0.71	0.00	
Cold (Clause 6.4.1 c) 1054g No.3	Flat	Front	179.9	0.51	0.00	Pass
			206.4	2.04	0.86	
	Flat	Right	200.5	1.96	0.02	Pass
			197.9	1.02	0.00	
	Hemi	Left	160.4	0.22	0.00	Pass
			168.4	0.21	0.00	
	Hemi	Rear	166.9	0.23	0.00	Pass
			184.9	0.79	0.00	
Wet (Clause 6.4.1 d) 1060g No.4	Flat	Front	185.4	0.68	0.00	Pass
			212.3	2.24	0.86	
	Flat	Rear	205.3	2.05	0.74	Pass
			221.6	2.37	1.41	
	Hemi	Left	166.8	0.29	0.00	Pass
			172.5	0.64	0.00	
	Hemi	Right	164.2	0.28	0.00	Pass
			173.5	0.76	0.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com

198 Wuzhu Road, Sclartech Park Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075191 www.sgs.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075191 e sgs.china@sgs.com

Annex-2 Retention system strength test results:

Test Specification: FMVSS 49 CFR 571.218

Ambient temperature at time of test: 22 °C

Condition	Max. extension (mm)	Assessment
Ambient (Clause 6.4.1 d) No.1	8.1	Pass
Hot (Clause 6.4.1 d) No.2	7.1	Pass
Cold (Clause 6.4.1 d) No. 3	8.2	Pass
Wet (Clause 6.4.1 d) No.4	8.4	Pass

Annex-3 Vision test result:

Head form: A DOT

Positioning Index: 45 mm

Peripheral vision: >105°

Brow opening: 42 mm

Sample Photo(s):



<p>Side view</p>	
<p>Back view</p>	





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

198 Nanzhu Road, Sclartech Park Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075191 www.sgs.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075191 e sgs.china@sgs.com

<p>Top view</p>	
<p>Bottom view</p>	
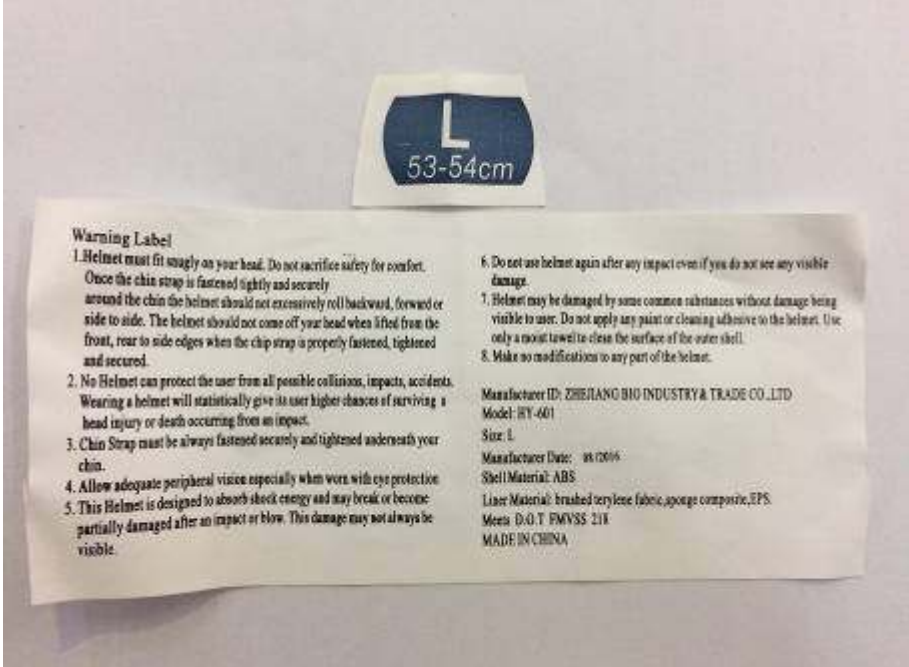
<p>Label</p>	 <p style="text-align: center;">L 53-54cm</p> <p>Warning Label</p> <ol style="list-style-type: none"> 1. Helmet must fit snugly on your head. Do not sacrifice safety for comfort. Once the chin strap is fastened tightly and securely around the chin the helmet should not excessively roll backward, forward or side to side. The helmet should not come off your head when lifted from the front, rear to side edges when the chin strap is properly fastened, tightened and secured. 2. No Helmet can protect the user from all possible collisions, impacts, accidents. Wearing a helmet will statistically give its user higher chances of surviving a head injury or death occurring from an impact. 3. Chin Strap must be always fastened securely and tightened underneath your chin. 4. Allow adequate peripheral vision especially when worn with eye protection. 5. This Helmet is designed to absorb shock energy and may break or become partially damaged after an impact or blow. This damage may not always be visible. 6. Do not use helmet again after any impact even if you do not see any visible damage. 7. Helmet may be damaged by some common substances without damage being visible to user. Do not apply any paint or cleaning adhesive to the helmet. Use only a moist towel to clean the surface of the outer shell. 8. Make no modifications to any part of the helmet. <p>Manufacturer ID: ZHEJIANG BNU INDUSTRY & TRADE CO.,LTD Model: HT-401 Size: L Manufacturer Date: 08/2016 Shell Material: ABS Liner Material: brushed terylene fabric, sponge composite, EPS. Meets: D.G.T FMVSS 218 MADE IN CHINA</p>
<p>Front test line for (A) DOT head form</p>	

Side test line for (A)
DOT head form



Rear test line for
(A) DOT head form



End of Report

